


ALV2 series / Peripherals

Perimeter Access Control Unit

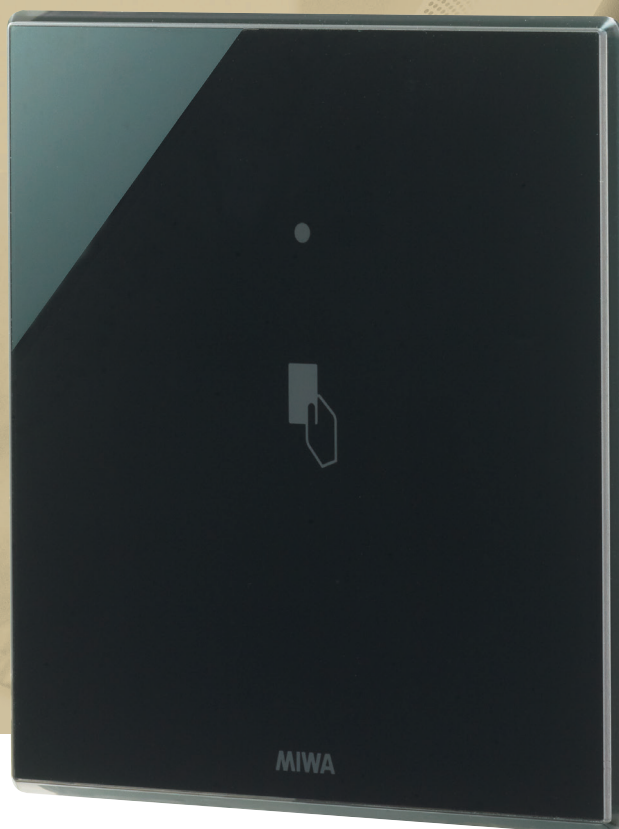

Card reader
RDFL – B03H

- Only the guests with a valid card keycard will have access to the gates.
- Up to 40 contacts relays available.
- Up to 4 card readers can be operable under one controller.

MIWA LOCK CO., LTD.

JAPAN 3-1-12, Shiba, Minato-ku, Tokyo 105-8510
URL : www.miwa-lock.biz

U.S.A 9272 Jeronimo, Suite 119, Irvine CA 92618
URL : www.miwalock.com

Specifications


Card reader

External dimensions	W116mm × H120mm × D45mm
Weight	250g
Power supply	Supplied from controller
Environmental condition	- 5°C ~ +50°C / 20 ~ 90%RH (No condensation)

Reader Controller

External dimensions	W374mm × H314mm × D115mm
Weight	6kg (without back-up battery)
Power supply	AC100V ~ 240V ± 10%
Power consumption	75VA
Output	Normal open or close contact Max 40 relays
Duration of contact	1 ~ 59 sec. adjustable
Contact capacity	DC30V / 2A · AC250V / 2A
Environmental condition	Internal installation only 0°C ~ +50°C / 20 ~ 80%RH (No condensation)

Diagram

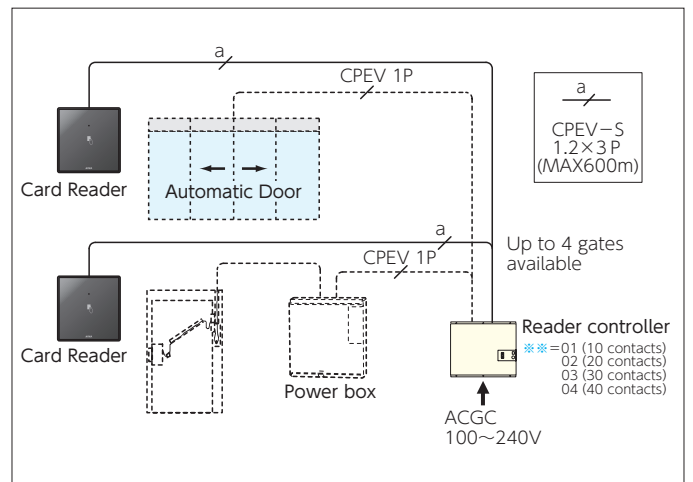

Detail Drawing

CMHL-401/402/403/404

RDFL-B03H

